

Mini 19 x 15W Bee-Eye Moving Head

DMX AND CONTROL REFERENCE - EXCERPT

This edition contains the model-specific operation and DMX reference page from the associated product guide. The reference page is reproduced in its existing layout, with all stated mode and firmware limitations retained.


This is a control-reference excerpt, not a complete installation or operating manual. It does not specify an operating-temperature range, power connection rating or approved rigging design. Confirm those items for the supplied fixture before installation.

Match the console patch to the actual fixture mode. Modes shown as manual-listed or unverified remain subject to the confirmation notes printed on the following page.

2. DMX Authority and Wiring Reference

The supplied R20, D4 and XML libraries all define 23CH, making 23CH the console-patching authority. The manuals additionally publish 21 / 35 / 78 / 92 / 97 / 99CH without matching supplied fixture libraries.

1-2	Pan / fine
3-4	Tilt / fine
5	Pan/tilt speed
6-7	Focus / optic rotation
8-9	Dimmer / strobe
10-15	RGBW / CTO / color macro
16-18	Pattern / pattern position
19-22	Effect/background RGBW
23	Reset

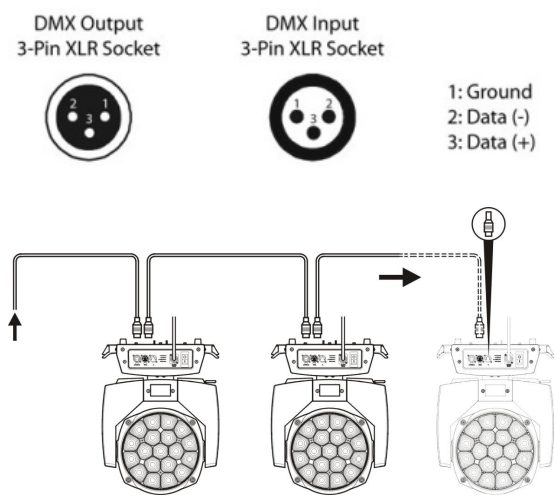

The D4 profile records pan 540 degrees and tilt 270 degrees. Use 3-core shielded cable: pin 1 ground, pin 2 DMX-, pin 3 DMX+.